


## BSD 963-12N Multimedia loop-through outlet 12 dB | 5...1006 MHz | CATV | DATA

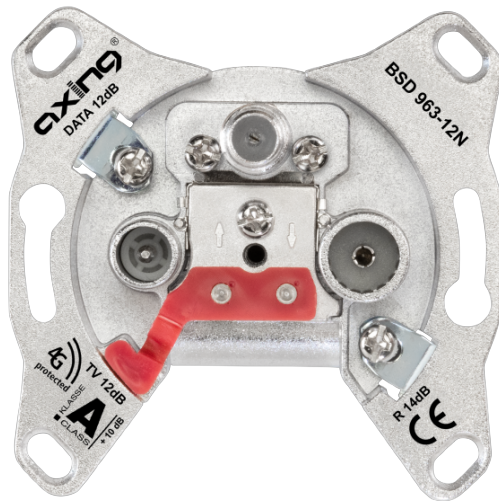

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated
- ✓ Vodafone listed

### Order information

Type	BSD 963-12N
Order no.	BSD96312N
GTIN	7611682001525
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
<b>Trunk line</b>	
Frequency range input	5...1006 MHz
Through loss @ 5...1006 MHz	≤ 3.5 dB
Frequency range output	5...1006 MHz
Suitable cables (Inner conductor   outer diameter)	0.63...1.13 mm   4.70...7.35 mm
<b>TV connector</b>	
Connector type	IEC-male
Frequency range	109...1006 MHz
Tap loss	12 dB ±1 dB
<b>Radio connector</b>	
Connector type	IEC-female
Frequency range	87.5...125 MHz
Tap loss	14 dB ±1.5 dB
<b>DATA connector</b>	
Connector type	F-female
Frequency range	5...1006 MHz
Tap loss	12 dB ±1 dB
Isolation TV@DATA @ 5...65 MHz	≥ 70 dB
Isolation TV@DATA @ 109...1006 MHz	≥ 30 dB
<b>General</b>	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.100 kg

### Suitable products

[SZU 2-01 Cover plate | TV/R/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 3-01 Terminating resistor, DC-isolated](#)