


BSD 967-14X Multimedia loop-through outlet 14 dB | 5 ... 1800 MHz | CATV | DATA

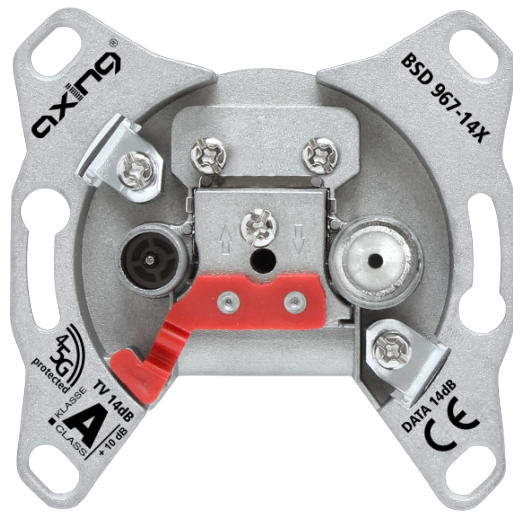

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ For DOCSIS 3.1/4.0 applications
- ✓ Suitable for broadband return path
- ✓ High overvoltage protection
- ✓ High intermodulation immunity (≤ 115 dBc)
- ✓ TV port IEC male
- ✓ DATA port F female
- ✓ Surface treated
- ✓ Vodafone listed according to VF TS 142 (for projects)

Order information

Type	BSD 967-14X
Order no.	BSD96714X
GTIN	7611682008333
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Screening factor acc. to EN 50083-2	Class A (+10 dB)
Trunk line	
Frequency range input	5 ... 1800 MHz
Through loss @ 5...1800 MHz	$\leq 1,8 \dots 4$ dB
Frequency range output	5 ... 1800 MHz
Suitable cables (inner conductor outer conductor outer diameter)	0.4 ... 1.13 mm 3.5 ... 6.0 mm 4.70 ... 7.35 mm
TV connector	
Connector type	IEC male
Tap loss	14 dB ± 1 dB
DATA connector	
Connector type	F female
Frequency range	5 ... 1800 MHz
Tap loss	14 dB ± 1 dB
Isolation TV@DATA @ 5 ... 204 MHz	≥ 60 dB
Isolation TV@DATA @ 258 ... 1800 MHz	≥ 25 dB
General	
Dimensions (W x H x D) appr.	68 x 68 x 39 mm
Weight	0.1 kg

Suitable products

[TZU 2-01 Cover plate | TV/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-11 Cover plate | TV/DATA | two-parts](#)

[TZU 1-10 Surface frame](#)